


INSTALLATION

1. Turn off power, open PC Case and remove 5.25" bay front panel.
2. Put JUICE BOX into 5.25" bay and screw tight.
3. Remove empty slot bracket and put on JUICE BOX slot bracket with power cord.
4. Connect AC power with JUICE BOX.
5. Connect EZ-Plug cables with JUICE BOX and peripherals.
6. Close PC case, power cord plugs into outlet and turn on power.

JUICE BOX TO VGA

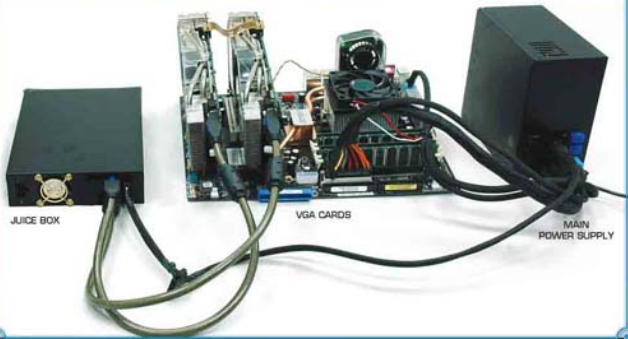

JUICE BOX

VGA CARDS

MAIN
POWER SUPPLY